


D CLASS PREMIUM AMPLIFIER FPX 4.800

Mode 4/3/2 channels
Powerfull and compact



- D class 4/3/2 Channels amplifier
- Stable under 2 Ohms
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- High power and current dynamic reserve

MECHANICAL DRAWING

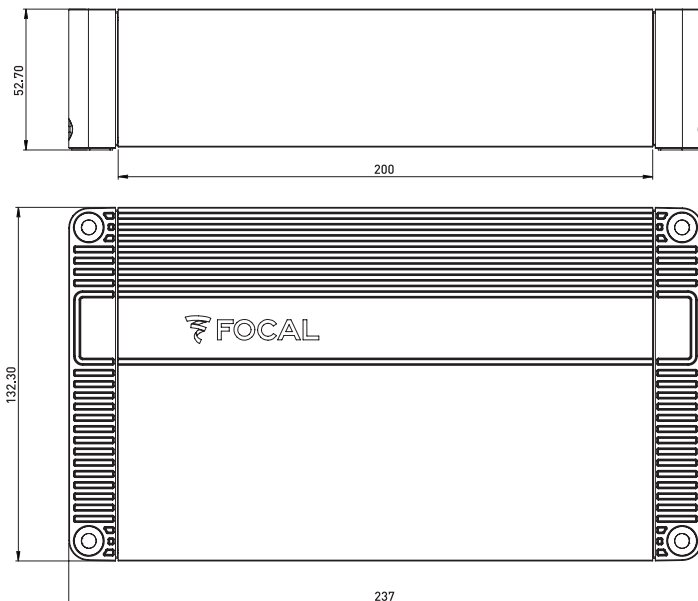

SPECIFICATIONS

AUDIO SPECIFICATIONS	
CEA power (4 ohms)	4x120 Watts RMS
Max. power (2 ohms)	4x185 Watts RMS
Max. power (4 ohms bridged)	2x370 Watts RMS
Bandwidth (-3dB)	10Hz - 20KHz
THD	0.01 %
Crosstalk (1 KHz)	> 55dB
SNR (1W/A)	> 76dBA

GENERAL FEATURES	
Subsonic filter	-
High-pass/low-pass filter	Configurable High-pass/low-pass 50Hz-500Hz
Bass boost	0 to 12dB linear (¾)
Phase	-
Full-range function	✓
Mirror mode	✓
Standby current (A)	1.1 A
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	9 ^{21/64} x5 ^{13/64} x2 ^{33/32} " [237x132x53mm]
Weight (kg)	4.40lbs [2kg]
Operating voltage range	8.3 to 16V

Performance
CREATE YOUR SOUND

FOCAL